
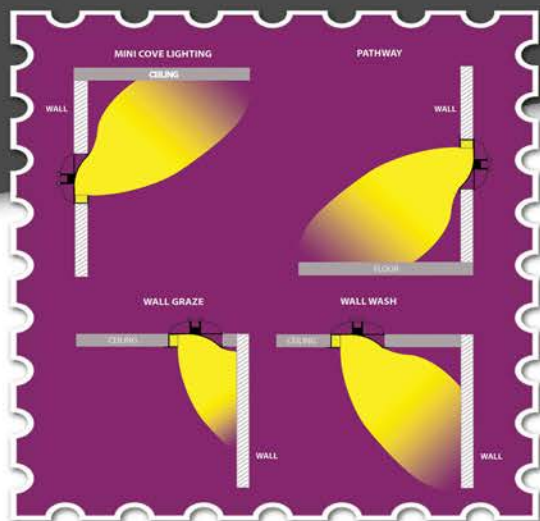


# IndiLyte

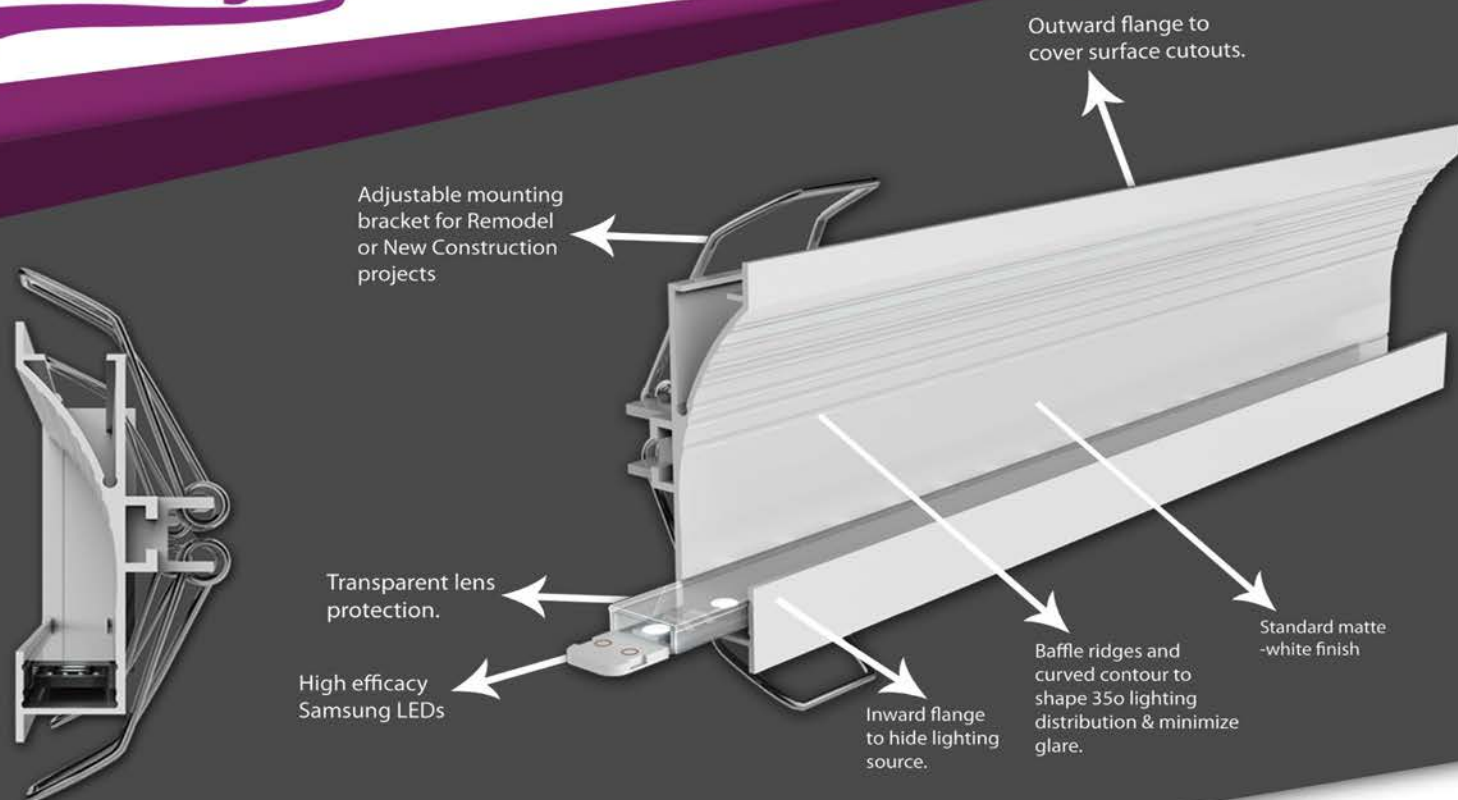

Ideal for Remodel or New Construction installation and Indoor damp or dry locations only.

- ❖ 350 WallWash,
- ❖ Wall Grazer,
- ❖ Pathway / Toe Kick
- ❖ Cove lighting.

The system may be secured directly into surfaces up to 1" inch thick with tool-free mounting clips for ease of installation and maintenance.

**Listing:** ETL listed to UL Standards for dry or damp locations. 5-year warranty. Made to order in USA.

## DCW: High Performance Recessed Pathway, Wall Grazer

Lumen packages	Color Temp. CCT	Dim Options	Available Lengths	Price Point
224Lm/ Ft.	2700K	0-10V	1' to 6	\$
560Lm/ Ft.	3000K	ELV		
1050Lm/ Ft.	3500K	DMX		
	4000K	DALI		
	RGBW			

Additional information including Specification Sheets, IES files and photos are available at [dalume.com](http://dalume.com)