

2' x 2' L.E.D. Center Bevel


MOUNTING

Suitable for standard exposed grid and screw slot T-bar ceilings, sheet rock or drywall ceiling. Optional for Recessed Flange Kit (**FL**) or Retro-Fit mounting into traditional 2x2 fluorescent Lay-In/Louver Troffers specify (**RF**). Reference Retro-Fit Spec Sheet for additional details.

Example: **DRL26-40-UD-30K-RF**

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL26	-25 :25W (3085Lm) ^ -27 :27W (2780Lm)* -40 :40W (4560Lm)	-UD 120V/277V Dimming -347V 347V** Dimming	-30K 3000K* -35K 3500K -40K 4000K* -50K 5000K*	-RF Retro-Fit ^ -EM Emergency Backup -FW 6' Flex Whip -FL Drywall Flange Kit

Note: * Designates extended lead time, ^ Designates 25 Watt Lamping with Retro-fit option only.
** DLC certification pending and not approved for 347V option.

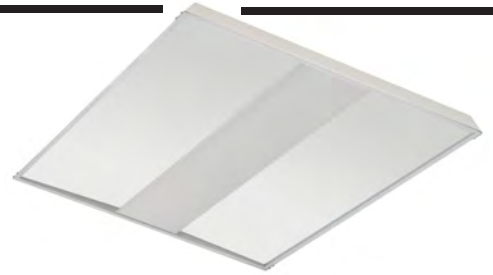

2' x 4' L.E.D. Center Bevel

MOUNTING

Suitable for standard exposed grid and screw slot T-bar ceilings, sheet rock or drywall ceiling. Optional for Recessed Flange Kit (**FL**) or Retro-Fit mounting into traditional 2x4 fluorescent Lay-In/Louver Troffers specify (**RF**). Reference Retro-Fit Spec Sheet for additional details.

Example: **DRL28-40-UD-30K-RF**

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL28	-35 :35W (4275Lm) ^ -40 :40W (4335Lm)* -65 :65W (7167Lm)	-UD 120V/277V Dimming -347V 347V Dimming	-30K 3000K* -35K 3500K -40K 4000K* -50K 5000K* -65K 6500K*	-RF Retro-Fit ^ -EM Emergency Backup -FW 6' Flex Whip -FL Drywall Flange Kit

Note: * Designates extended lead time, ^ Designates 35 Watt Lamping with Retro-fit option only.

2' x 2' L.E.D. Center Bevel (Retro-Fit)

MOUNTING

Retro-Fit mounting into traditional 2x2 fluorescent Lay-In/Louver Troffers, specify (-RF). A minimum of 23.42" x 23.42" x 3.07" cavity is required.

Example: **DRL26-25-UD-30K-RF**

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL26	-25 :25W (3085Lm) ^	-UD 120V/277V Dimming -347V 347V Dimming	-30K 3000K* -35K 3500K -40K 4000K* -50K 5000K*	-RF Retro-Fit ^ -EM Emergency Backup

Note: * Designates extended lead time.



2' x 4' L.E.D. Center Bevel (Retro-Fit)

MOUNTING

Retro-Fit mounting of traditional 2x4 fluorescent Lay-In/Louver Troffers, specify (-RF). A minimum of 45.87" x 23.42" x 3.07" cavity is required.

Example: **DRL28-35-UD-30K-RF**

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL28	-35 :35W (4275Lm) ^	-UD 120V/277V Dimming -347V 347V Dimming	-30K 3000K* -35K 3500K -40K 4000K* -50K 5000K*	-RF Retro-Fit ^ -EM Emergency Backup

Note: * Designates extended lead time.

