


DLP5

Ceiling Cut-out Dimensions

# of LAMPS:	LENGTH(A)	WIDTH
1 Lamp	7"	7"
2 Lamp	13"	7"
3 Lamp	19 9/16"	7"
4 Lamp	25 3/4"	7"

DEPTH - Depending on lamp height adjustment
 DLR DL DLP

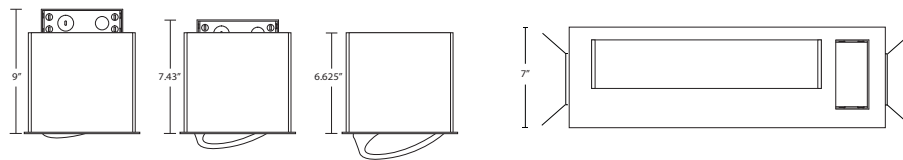

Application: Another excellent univesal solution in retail and high-end commercial lighting combining the best features of adjustability with energy efficiency LED Technology providing superior control and an unsurpassed performance, with a clean, neat ceiling appearance.

Housing: Die-cast aluminum heat sink and luminaire housing Laser cut steel flange. Formed steel upper housing and mounting frame. Available in black and white (Smooth Gloss: Cardinal T007-WH121/RAL9003). Can be accessed from below for easy maintenance.

Mounting: Comes with a 7/16"(11.02mm) visible flange and Spackle flange for a universal fit to any structural ceiling. Architectural Hanger Bars are also available, **sold seperatly**.




Performance: 17W LED module, 80+ CRI at 1700+ lumens per module. Available in 3000K, 3500K, 4000K color temperatures. Also available in line voltage 75W max.

Aiming: Fully adjustable 60° tilt and 358° lamp rotation with adjustable heighth selections.

Optics: Field-changeable beam control options, Spot(15°), Flood(35°), Wide Flood(65°) field changeable optics delivering 1700+ Lumens, 90+ CRI available, consult factory.

Labels: c/ETL Listed to UL Standard. Dry and Damp locations only.

Warranty: Complete 5 year warranty. Contact factory for details.

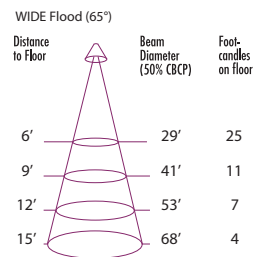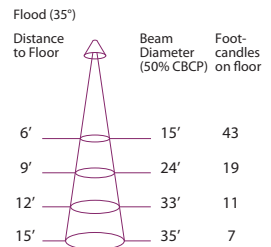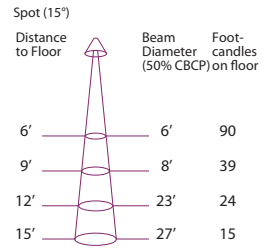

LED Ordering Guide:

Example: DLP52L-17-FL-35-RSW

Ordering	# of LAMPINGS	LED Wattage	BEAM SPREAD	COLOR TEMP	DRIVER	FLANGE	FINISH
DLR5	1L :1 Lamp	17: :17 W	-SP :Spot 15deg.	-27K* :2700K	-Blank :120/227V	-Blank Visible Flange	-B :Black
DL5	2L :2 Lamp		-FL :Flood 35deg.	-30K :3000K	-UD :Dim 0-10V	-RS Spackle Flange	-W :White
DLP5	3L :3 Lamp		-WFL :WideFL 35deg.	-35K :3500K	-DL :Dali Dim		-CC :Custom Color*
	4L :4 Lamp			-40K :4000K	-347 347V		
	X_L :4X Lamp**			*Ext Lead Time			*Ext Lead Time
	** in 6" or 12" increments with RS Flange Only			*90 CRI available			

LINE VOLTAGE Ordering Guide:

Example: DLR54LP3875-RS-CC*

Ordering	# of LAMPING	LAMP TYPE	WATTAGE	FLANGE	FINISH
DLR5	1L :1 Lamp	-P30 :120V PAR 30	-75 :75W	-Blank Visible Flange	-B :Black
DL5	2L :2 Lamp	-P38 :120V PAR 38		-RS Spackle Flange	-W :White
DL5	3L :3 Lamp				-CC :Custom Color*
	4L :4 Lamp				
	X_L :4X Lamp**				*Ext Lead Time
	** in 6" or 12" increments with RS Flange Only				

2015.01.27