
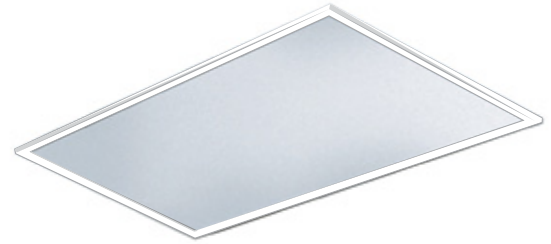


2' x 4' L.E.D. Lay In

DIMENSIONS (HOUSING)

A: DEPTH	4 5/8"
B: DEPTH	3 1/2"
C: WIDTH	24"
D: LENGTH	48"

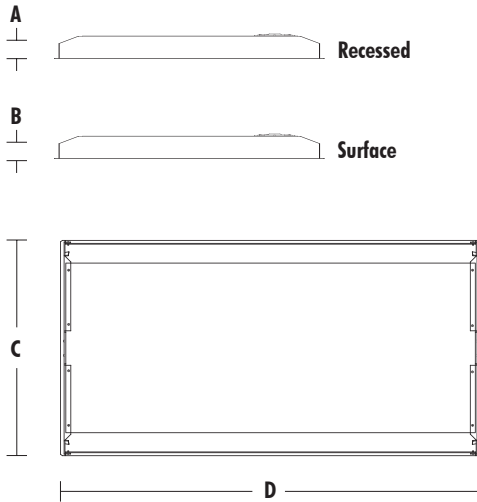

APPLICATION

2x4 LED is ideal for energy conscious facilities with high design standards. Luminaire offers a clean ceiling look without any ceiling cavities, fully lensed flat panel design uses state of the art LED technology for high output of light and long life.

DRIVER

Electronic 60W 120V/277V input, 24V output. Meets IP 64 standards. Active PFC to conserve power consumption. Over voltage, over current and short circuit protection auto recovery.

FEATURES

General lamp positioning with white acrylic overlay eliminates lamp image while providing superior even balanced illumination.

OPTICS

Proprietary white translucent lens for optimal efficiency and wide beam pattern.

HOUSING

Aluminum construction and heat sinks ensure cool thermal transfer. Standard white enamel finish.

MOUNTING


Suitable for surface wall/ceiling mount installations (SM Option) or may be recessed for downlight use in T-Bar grid ceilings & sheet rock/drywall (RM option).

CERTIFICATION

ETL Listed to UL/cUL standards 1598. Standard options may have contact with loose insulation (IC Rated) with exception to Emergency Back-up option. EM requires 3" spacing from insulation on all surfaces.

WARRANTY

5-year limited warranty to be free from defect in material and workmanship from the date of manufacture. 50,000 Hours at L70 at (70% lumen output). See website for warranty details.

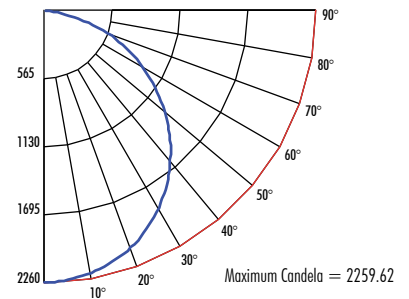

LUMINANCE DATA (cd/sq.m)

ANGLE IN DEGREES	AVERAGE 0-DEGREES	AVERAGE 45-DEGREES	AVERAGE 90-DEGREES
45	2661	2753	2871
55	2494	2595	2738
65	2296	2397	2533
75	2031	2140	2264
85	1216	1409	1687

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	213.19
10-20	605.09
20-30	902.3
40-50	1085.07
50-60	963.44
60-70	728.13
80-90	111.44

Example: DRL24-60-120-41K

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL24	-60 :60W	UE 120/277V UD 120/277V 0-10V Dim	-41K 4100K	-CC Custom Color -EM Emergency Backup* -FW 6' Flex Whip -SM Surface Mount Canopy -FL Drywall Flange Kit

Notes: * Non IC Rated.

2019.07.18