


PROJECT NAME: _____ DATE: _____
 CATALOG#: _____ TYPE: _____

DĀLUME

Darline Collection

2' x 2' L.E.D. Center Bevel (Retro-Fit)

DIMENSIONS (RECESSED MOUNT)	
A: DEPTH	2.8"
B: LENGTH	23.9"
C: WIDTH	23.9"

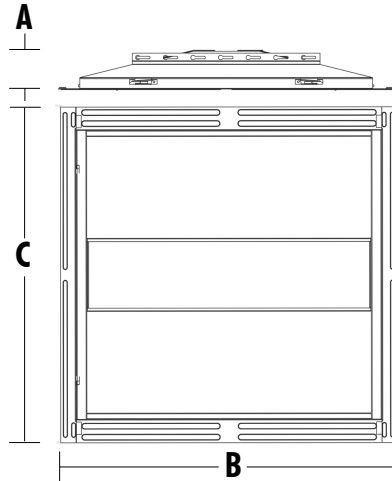

APPLICATION

General lighting for environments where wide, crisp and even light distribution is required. Ideal for applications such as Healthcare, Education, Public Spaces and Commercial.

FEATURES

Center mounted bevel channel houses advance optics diffuse lamp image while providing superior even balanced illumination. Door hinge design for easy maintenance and washable surface. Supplied with Retro-Fit LED Luminaire, Brackets, Safety Cable and Relamping lables.

ELECTRICAL

120V/277 Vac 50/60Hz
 0-10V Dimmable Standard
 24W Emergency Mode Option
 347V Input Option

HOUSING/OPTICS

Premium 20 gauge cold rolled steel housing / frosted acrylic shield.
 High reflectance (91%) matte white polyester powder coat providing high luminaire efficiency with 120 lumens/Watt, 80+ CRI, +/- 100 CCT. Extra Wide 180° beam angle.

MOUNTING

Retro-Fit mounting into traditional 2x2 fluorescent Lay-In/Louver Troffers, specify (-RF). A minimum of 23.42" x 23.42" x 3.07" cavity is required.

CERTIFICATION

UL Listed to UL/cUL standards 1598 for dry or damp locations. DLC Approved. 60,000H L70.


WARRANTY

5-year limited warranty to be free from defect in material and workmanship from the date of manufacture.

Performance

OUTPUT PERFORMANCE

IES INDOOR REPORT DRL26-25W-UD-40K-RF-IES

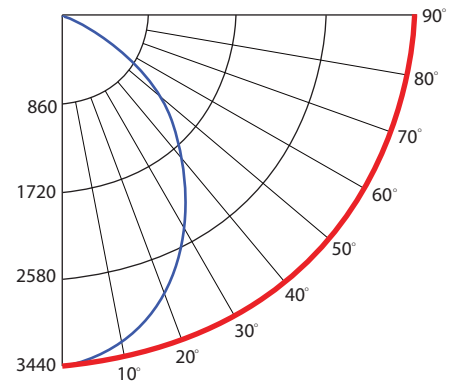

ZONAL LUMEN SUMMARY

Zone	Lumen	%Fixt
0-30	1085.61	35.3
0-40	1676.67	54.4
0-60	2613.57	84.7
0-90	4274.39	100
90-120	.03	0
90-130	.22	0
90-150	.81	0
90-180	1.25	0
0-180	3084.82	100

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	142.84
10-20	393.72
20-30	549.4
30-40	591.06
40-50	530.11
50-60	406.58
60-70	275.89
70-80	154.6
80-90	39.73
90-100	.0
100-110	.01
110-120	.02
120-130	.19
130-140	.29
140-150	.29
150-160	.22
160-170	.15
170-180	.07

Example: DRL26-25-UD-25K-RF

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL26	-25 :25W (3085Lm) ^	UD 120V/277V Dimming -347V 347V Dimming	-30K 3000K* -35K 3500K -40K 4000K* -50K 5000K*	-RF Retro-Fit ^ -EM Emergency Backup

Note: * Designates extended lead time.

PROJECT NAME: _____ DATE: _____
 CATALOG#: _____ TYPE: _____

DĀLUME®


Darline Collection

INSTALLATION KEY FEATURES

Universal Keyhole mounting holes for retrofitting existing fluorescent fixtures.




Swing and hang retro-fit luminaire for support.

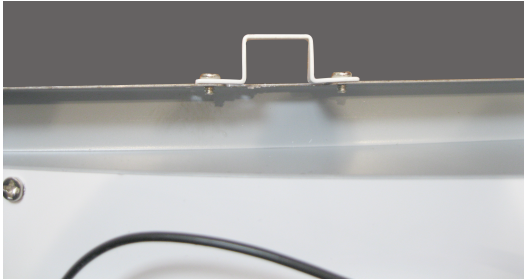

Open/Close latches for easy installation and maintenance.




Pre-wired quick connectors included.

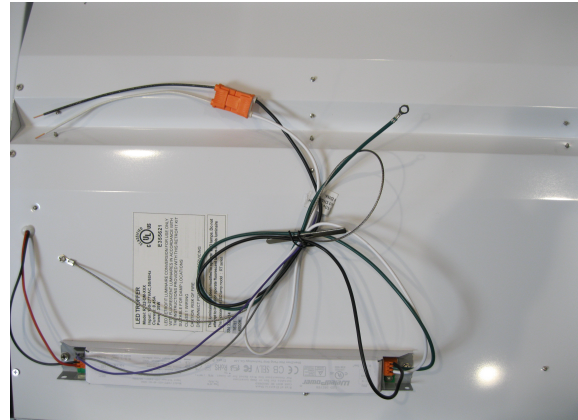


WIRING DIAGRAM

Before Installation of the Wiring Diagram

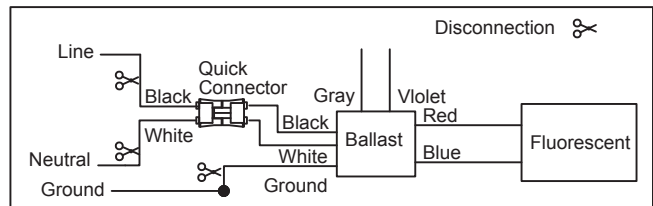

After Installation of the Wiring Diagram

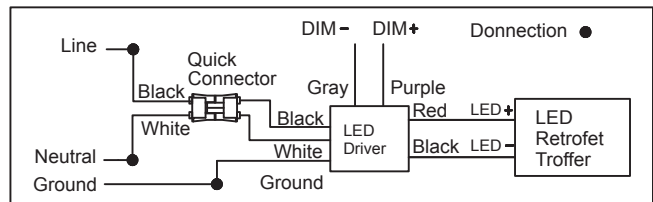

For a detailed step-by-step explanation, visit dalume.com.

99051914