


2' x 2' L.E.D. Center Opal Lay In

DIMENSIONS (RECESSED MOUNT)

A: DEPTH	3.1"
B: LENGTH	23.7"
C: WIDTH	23.7"

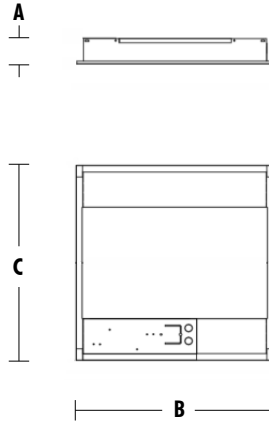

APPLICATION

General lighting for environments where wide, crisp and even light distribution is required. Ideal for applications such as Healthcare, Education, Public Spaces and Commercial.

FEATURES

General lamp positioning with white acrylic overlay eliminates lamp image while providing superior even balanced illumination. Easy maintenance and washable surface.

ELECTRICAL

120V/277 Vac 50/60Hz
 0-10V Dimmable
 24W Emergency Mode Option
 347V Input Option

HOUSING/OPTICS

Premium 20 gauge cold rolled steel housing / white acrylic shield.
 High reflectance (91%) matte white polyester powder coat providing high luminaire efficiency with 125 lumens/Watt, 80+ CRI, +/- 250 CCT. Extra Wide 180° beam angle.

MOUNTING


Suitable for standard exposed grid and screw slot T-bar ceilings, sheet rock or drywall ceiling. Optional for Recessed Flange Kit.

CERTIFICATION

ETL Listed to UL/cUL standards 1598 for dry or damp locations. DLC Approved. 60,000H L70.

WARRANTY

5-year limited warranty to be free from defect in material and workmanship from the date of manufacture.

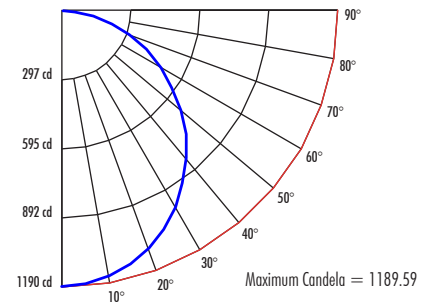

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	0 - Degree	45 - Degree	90 - Degree
45	3928	4015	4210
55	3740	3930	4301
65	3395	3820	4534
75	2708	3685	5088
85	1486	1324	254

ZONAL LUMEN SUMMARY

Angle In Degrees	Angle In Degrees
0-10	112.58
10-20	323.33
20-30	492.93
30-40	600.26
40-50	632.19
50-60	586.06
60-70	470.19
70-80	297.04
80-90	56.06
90-100	.46
100-110	.63
110-120	.73
120-130	.8
130-140	.88
140-150	.85
150-160	.72
160-170	.58
170-180	.22

Example: DRL27-40-UD-30K

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL27	-40 :40W	UD 120V/277V Dimming -347V 347V Dimming	-41K 4100K	-CC Custom Color -EM Emergency Backup -FW 6' Flex Whip -FL Drywall Flange Kit

2019.07.18