


## 2' x 4' Center Opal Lay In

### DIMENSIONS (RECESSED MOUNT)

A: DEPTH	3.10"
B: LENGTH	47.70"
C: WIDTH	23.70"

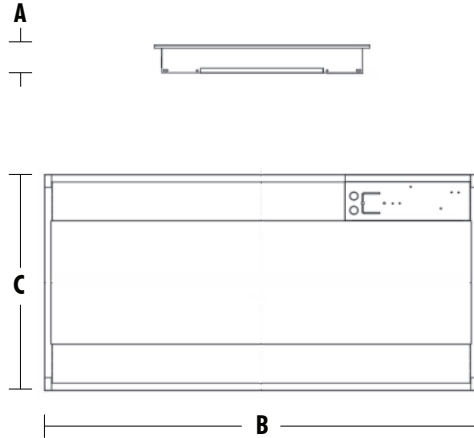

### APPLICATION

General lighting for environments where wide, crisp and even light distribution is required. Ideal for applications such as Healthcare, Education, Public Spaces and Commercial.

### FEATURES

General lamp positioning with white acrylic overlay eliminates lamp image while providing superior even balanced illumination. Easy maintenance and washable surface.

### ELECTRICAL

120V/277 Vac 50/60Hz  
 0-10V Dimmable  
 24W Emergency Mode Option  
 347V Input Option

### HOUSING/OPTICS

Premium 20 gauge cold rolled steel housing / white acrylic shield.  
 High reflectance (91%) matte white polyester powder coat providing high luminaire efficiency with 125 lumens/Watt, 80+ CRI, +/- 250 CCT. Extra Wide 180° beam angle.

### MOUNTING


Suitable for standard exposed grid and screw slot T-bar ceilings, sheet rock or drywall ceiling. Optional for Recessed Flange Kit.

### CERTIFICATION

ETL Listed to UL/cUL standards 1598 for dry or damp locations. DLC Approved. 60,000H L70.

### WARRANTY

5-year limited warranty to be free from defect in material and workmanship from the date of manufacture.

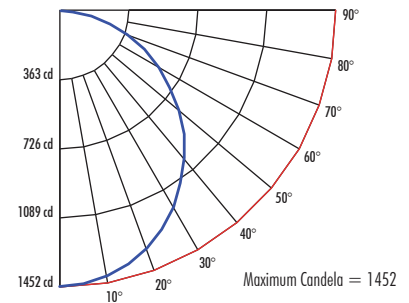

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	0 - Degree	45 - Degree	90 - Degree
45	4083	4065	4078
55	4019	4070	4170
65	3786	4107	4417
75	3134	4296	5047
85	1645	1358	265

### ZONAL LUMEN SUMMARY

Angle In Degrees	Angle In Degrees
0-10	137.55
10-20	397.06
20-30	610.84
30-40	754.23
40-50	806.66
50-60	760.47
60-70	623.24
70-80	408.74
80-90	85.27
90-100	.84
100-110	1.11
110-120	1.26
120-130	1.33
130-140	1.39
140-150	1.23
150-160	.95
160-170	.69
170-180	.26

Example: DRL29-40-UD-30K

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL29	-40 :40W	UD 120V/277V Dimming -347V 347V Dimming	-41K 4100K	-CC Custom Color -EM Emergency Backup -FW 6' Flex Whip -FL Drywall Flange Kit

2019.07.18